




## LUMiNODE SDM-485DMX-M

The module can be used for intelligent lighting control systems for luminaires with a DMX-512 interface.

The module listens on input 230V powerline for commands from SEAK modulator. Každý modul má pridelené svoje jedinečné ID číslo. It gets assigned an ID and supports full range of dimming commands (individual, group and broadcast level).

### Features

- ✓ Two-way powerline communication QM-50-SSI3
- ✓ Lighting control in real time
- ✓ Autonomous lighting control
- ✓ Lighting control using lighting scenes (max. 15 scenes)
- ✓ Adjustable from 0 to 100%
- ✓ All control outputs are galvanically isolated from the input 230V
- ✓ Can control up to 8 DMX channels

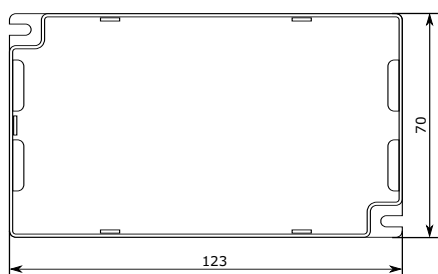

Parameter	Value
Input voltage	AC 220 V ~ 240 V; 50 Hz
Consumption	0,8 W
Communication interface	2-way QM-50-SSI3
Powerline communication distance	Up to 5000 m
Output	DMX interface
Protection class	II.
IP rating	IP20